

DGP-1500

POWERED BY:



Generating Set pictured may include optional accessories.



ENGINE / TECHNICAL DATA

Engine Make	Perkins			
Engine Model	4012-46TAG2A			
Governing class	Digital			
Number of Cylinders	12			
Cylinder Arrangement	60° Vee form			
Bore and Stroke mm	160 x 190			
Displacement / Cubic Capacity litres	45.842			
Induction System	Turbocharged, air to air charge cooled			
Cycle	4 stroke			
Combustion System	Direct Injection			
Compression Ratio	13:1			
Rotation	Anti-clockwise, viewed on flywheel			
Cooling System	Water - cooled			
Frequency and Engine Speed	50Hz & 1500rpm		50Hz & 1500rpm	
	Prime	Standby	Prime	Standby
Gross Engine Power kW (hp)	1331(1785)	1459(1957)	1332(1786)	1459(1957)
Fuel Consumption @ %50 load L/hr	157.0	-	171.0	-
@ %75 load L/hr	234.0	-	195.0	-
@ %100 load L/hr	310.0	341.0	319.0	251.0
Total Lubrication System Capacity litres	177.0	177.0	177.0	177.0
Total Coolant Capacity (inc. radiator) litres	207	207	207	207
Exhaust Temperature: C°	455	455	455	455
Radiator Cooling Air Flow (Min) : m3/sec	20.2	20.2	20.2	20.2
Combustion Air Flow : m3/min	120.0	128.0	-	-
Exhaust Gas Flow : m3/min	320.0	320.0	-	-
Fuel Tank Capacity : litres	N/A	N/A	N/A	N/A

ALTERNATOR DATA

Make	Leroy Somer LSA
Model	LSA 50.2 L8
KVA	1500
KW	1200
No. of bearings	1
Insulation class	H
Total Harmonic Content	in linear load <3.5% , at no load <3.5%
Winding Leads	6
Ingress Protection	IP23
Excitation System	Excited by P.M.G
Winding Pitch	2/3
AVR Model	R450
Overspeed	2250 mn ⁻¹
Voltage Regulation	±0.5 %
Short Circuit Capacity	-

RATINGS DEFINITION

PRIME POWER

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power.
10% overload power is available for 1 hour in 12 hours continuous operation.

OUTPUT RATINGS

Output Ratings	Prime	Standby
380-415 V 3 ph, 50Hz 1500 rpm	1521.98 KVA 1217.59 KW	1674.18 KVA 1339.34 KW

Applicable Voltages: 220/127 V at 60 Hz only
(Consult your dealer for more details)

Ratings at 0.8 Power Factor

DIMENSIONS & WEIGHT

Length (mm)	Width (mm)	Height (mm)	Weight - wet (kg)
12056	2347	2684	14520

* For skid mounted genset without enclosure wet weight = with lube oil and coolant

CONTROL PANEL

Make	Deep Sea
Model	DSE7310/7320

The DSE7310 is an Automatic start Control Module and The DSE7320 is an auto Mains(Utility) Failure Control Module. Both Modules have been designed to start and stop diesel and gas generating sets that include electronic and non-electronic engines.
The DSE7320 includes the additional capability of being able to monitor a mains(utility) supply.

- Backed up real time clock
- 132x64 pixel LCD display
- Programmable event logging(50), showing reason, date and time
- Five key menu navigation
- Fully configurable via PC software
- Configurable start & fuel outputs
- KWh monitoring
- Automatic load transfer
- Magnetic pick-up
- Front panel programming
- Multiple date and time exercise scheduler
- Programmable load shedding/acceptance
- KW overload protection
- Unbalanced load protection
- DSENet compatible
- Engine exercise mode

STANDBY POWER

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure.
No overload is permitted on these ratings.



STANDARD SPECIFICATIONS

1 - ENGINE

Perkins four stroke heavy duty high performance industrial type diesel engine.

2 - ENGINE FILTRATION SYSTEM

- Cartridge type dry air filters.
 - Cartridge type fuel filters.
 - Full flow lube oil filters.
- All filters have replaceable elements.

3 - COOLING RADIATOR

Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures (consult your dealer for de-rating factors).

4 - EXHAUST SYSTEM

Silencer noise reduction level	10 (dB)
Maximum allowable back pressure	5.0 (kPa)

5 - CIRCUIT BREAKER TYPE

3 pole MCB / MCCB (supplied disconnected and without cables)

6 - FUEL SYSTEM

On Generating Sets up to 2000 KVA, the base frame design can be incorporated with an integral fuel tank with a capacity of approx. 8 hours running at Full Load. The tank is supplied complete with fill cap breather fuel feed and return lines to the Engine and drain plug.

7 - ALTERNATOR

7.1 - INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin.
- Heavy coat of antitracking varnish additional protection against moisture.

7.2 - AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at $\pm 0.5\%$.
Nominal adjustment by means of a trim pot incorporated on the AVR.

7.3 - MOTOR STARTING

An overload capacity equivalent to 300% of the Full Load impedance at zero Power Factor can be sustained for 10 seconds.

8 - MOUNTING ARRANGEMENT

8.1 - BASE FRAME

The complete Generating Set is mounted as a whole on a heavy duty fabricated steel Baseframe.

8.2 - COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange.
The Engine Flywheel is flexibly coupled to the Alternator rotor.

8.3 - ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between the Engine / Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.
The Fan & Fan Drive along with Battery Charging.

8.4 - SAFETY GUARDS

The Fan & Fan Drive along with the Battery Charging Alternator are Safely Guard protected for personal protection.

9 - FACTORY TESTS


- The Generating set is load tested before dispatch.
 - All protective devices control functions and site load conditions are simulated.
- The generator and it's systems are checked before dispatch.

10 - EQUIPMENT FINISHING

all mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

AVAILABLE OPTIONS & ACCESSORIES

We offer a range of optional features and accessories to tailor our generating sets to meet your power needs.

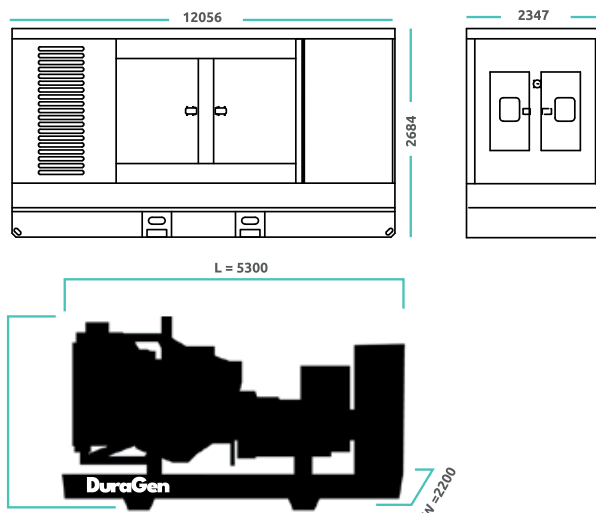

OPTIONS

- Water jacket heater.
- A variety of generating set
- Additional protection alarms.
- Water fuel separator control and synchronizing and shutdowns.
- Panels.
- Battery charger.

ACCESSORIES

- SWITCHES.
- LOAD BANKS.
- AUXiliary fuel tanks.
- Manual & automatic.
- Genuine spare parts transfer.

STANDARD REFERENCE CONDITIONS

Output ratings are presented at 25°C air inlet temperature, barometric pressure 100 kPa, relative humidity 30%.

This generating set is designed to operate at high ambient temperature (up to 55°C), humidity (up to 99%) and altitudes.

De-rating may apply, please consult your dealer for specific site ratings.

DURAGEN generators are assembled some of the specifications are not standard on all genset models.
in Facilities certified to ISO 9001 All information in this document is substantially correct at time of printing and may be altered subsequently.

Generating set pictured may include optional accessories.

11. DOCUMENTATIONS a set of Operation & Maintenance manual, Circuit wiring diagrams and Commissioning / Fault Finding instruction leaflets accompany the Generator.

12. QUALITY STANDARDS The equipment meets the following standards: BS4999, BS5000, BS5514 IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528.

13. WARRANTY All of the Generating Sets are covered under a warranty policy for a period of 12 months. Warranty of the equipment is in line with manufacturers warranty terms & conditions.

(check warranty statement for more details, as it may vary for different countries) In line with continuous product development, we reserve the right to change specifications without notice.

For further information on all of the standard and optional features accompanying this product please contact your local dealer or visit:

WWW.DURAGEN.NET

