

DC-52

WITH TWO REDUCTION GEARS WHICH INCREASE THE CUT POWER WITH A LOW ENERGY COSTS.
GEARS AND PINION GEARS IN TEMPERED STEEL, WET IN OIL.
STRONG FRAME, WITH ELECTRIC LEVER AND MECHANICAL LEVER CONTROL.
BLADES INTERCHANGEABLE WITH 4 CUT CORNERS.



MACHINE DATA


Machine Model	DC-52
Round bar	4~50mm
Rebar	4~40mm
Power	4KW
Volatge	220V,380V,415V etc...
GW/NW	545Kg/500Kg
Dimension	142*52*83 (cm)



• It's so easy to use, insert rebar in the cutting space, then pull the clutch, machine will cut.



• Plain blade and C type blade are available, that depends on choice.

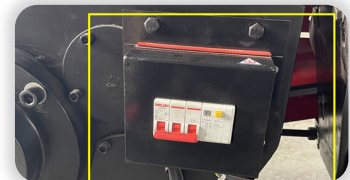

• Safety power switch.



• Safety cover for protecting hand.



• Clutch for cutting function.




• Belt cover, steel material, longlife time and safety.



• Sliding bracket for rebar, it's a roller.



• It's better that inject 10ml dilute machine oil per hour.

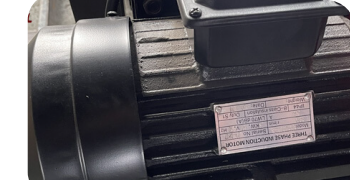

• Copper coiled electric motor.



• Lifting ring, convenient for move to anywhere.



• Injection 5-8kg machine oil before using.



• Overview by top.

